

Network Working Group
Request for Comments: 4493
Category: Informational

JH. Song
R. Poovendran
University of Washington
J. Lee
Samsung Electronics
T. Iwata
Nagoya University
June 2006

The AES-CMAC Algorithm

Status of This Memo

This memo provides information for the Internet community. It does not specify an Internet standard of any kind. Distribution of this memo is unlimited.

Copyright Notice

Copyright (C) The Internet Society (2006).

Abstract

The National Institute of Standards and Technology (NIST) has recently specified the Cipher-based Message Authentication Code (CMAC), which is equivalent to the One-Key CBC MAC1 (OMAC1) submitted by Iwata and Kurosawa. This memo specifies an authentication algorithm based on CMAC with the 128-bit Advanced Encryption Standard (AES). This new authentication algorithm is named AES-CMAC. The purpose of this document is to make the AES-CMAC algorithm conveniently available to the Internet Community.

Table of Contents

- 1. Introduction2
- 2. Specification of AES-CMAC3
 - 2.1. Basic Definitions3
 - 2.2. Overview4
 - 2.3. Subkey Generation Algorithm5
 - 2.4. MAC Generation Algorithm7
 - 2.5. MAC Verification Algorithm9
- 3. Security Considerations10
- 4. Test Vectors11
- 5. Acknowledgement12
- 6. References12
 - 6.1. Normative References12
 - 6.2. Informative References12
- Appendix A. Test Code14

1. Introduction

The National Institute of Standards and Technology (NIST) has recently specified the Cipher-based Message Authentication Code (CMAC). CMAC [NIST-CMAC] is a keyed hash function that is based on a symmetric key block cipher, such as the Advanced Encryption Standard [NIST-AES]. CMAC is equivalent to the One-Key CBC MAC1 (OMAC1) submitted by Iwata and Kurosawa [OMAC1a, OMAC1b]. OMAC1 is an improvement of the eXtended Cipher Block Chaining mode (XCBC) submitted by Black and Rogaway [XCBCa, XCBCb], which itself is an improvement of the basic Cipher Block Chaining-Message Authentication Code (CBC-MAC). XCBC efficiently addresses the security deficiencies of CBC-MAC, and OMAC1 efficiently reduces the key size of XCBC.

AES-CMAC provides stronger assurance of data integrity than a checksum or an error-detecting code. The verification of a checksum or an error-detecting code detects only accidental modifications of the data, while CMAC is designed to detect intentional, unauthorized modifications of the data, as well as accidental modifications.

AES-CMAC achieves a security goal similar to that of HMAC [RFC-HMAC]. Since AES-CMAC is based on a symmetric key block cipher, AES, and HMAC is based on a hash function, such as SHA-1, AES-CMAC is appropriate for information systems in which AES is more readily available than a hash function.

This memo specifies the authentication algorithm based on CMAC with AES-128. This new authentication algorithm is named AES-CMAC.

2. Specification of AES-CMAC

2.1. Basic Definitions

The following table describes the basic definitions necessary to explain the specification of AES-CMAC.

<code>x y</code>	Concatenation. <code>x y</code> is the string <code>x</code> concatenated with the string <code>y</code> . <code>0000 1111</code> is <code>00001111</code> .
<code>x XOR y</code>	Exclusive-OR operation. For two equal length strings, <code>x</code> and <code>y</code> , <code>x XOR y</code> is their bit-wise exclusive-OR.
<code>ceil(x)</code>	Ceiling function. The smallest integer no smaller than <code>x</code> . <code>ceil(3.5)</code> is 4. <code>ceil(5)</code> is 5.
<code>x << 1</code>	Left-shift of the string <code>x</code> by 1 bit. The most significant bit disappears, and a zero comes into the least significant bit. <code>10010001 << 1</code> is <code>00100010</code> .
<code>0^n</code>	The string that consists of <code>n</code> zero-bits. <code>0^3</code> means <code>000</code> in binary format. <code>10^4</code> means <code>10000</code> in binary format. <code>10^i</code> means 1 followed by <code>i</code> -times repeated zeros.
<code>MSB(x)</code>	The most-significant bit of the string <code>x</code> . <code>MSB(10010000)</code> means 1.
<code>padding(x)</code>	<code>10^i</code> padded output of input <code>x</code> . It is described in detail in section 2.4.
Key	128-bit (16-octet) long key for AES-128. Denoted by <code>K</code> .
First subkey	128-bit (16-octet) long first subkey, derived through the subkey generation algorithm from the key <code>K</code> . Denoted by <code>K1</code> .


Second subkey	128-bit (16-octet) long second subkey, derived through the subkey generation algorithm from the key K. Denoted by K2.
Message	A message to be authenticated. Denoted by M. The message can be null, which means that the length of M is 0.
Message length	The length of the message M in octets. Denoted by len. The minimum value of the length can be 0. The maximum value of the length is not specified in this document.
AES-128(K,M)	AES-128(K,M) is the 128-bit ciphertext of AES-128 for a 128-bit key, K, and a 128-bit message, M.
MAC	A 128-bit string that is the output of AES-CMAC. Denoted by T. Validating the MAC provides assurance of the integrity and authenticity of the message from the source.
MAC length	By default, the length of the output of AES-CMAC is 128 bits. It is possible to truncate the MAC. The result of the truncation should be taken in most significant bits first order. The MAC length must be specified before the communication starts, and it must not be changed during the lifetime of the key.

2.2. Overview

AES-CMAC uses the Advanced Encryption Standard [NIST-AES] as a building block. To generate a MAC, AES-CMAC takes a secret key, a message of variable length, and the length of the message in octets as inputs and returns a fixed-bit string called a MAC.

The core of AES-CMAC is the basic CBC-MAC. For a message, M, to be authenticated, the CBC-MAC is applied to M. There are two cases of operation in CMAC. Figure 2.1 illustrates the operation of CBC-MAC in both cases. If the size of the input message block is equal to a positive multiple of the block size (namely, 128 bits), the last block shall be exclusive-OR'ed with K1 before processing. Otherwise, the last block shall be padded with 10^i (notation is described in section 2.1) and exclusive-OR'ed with K2. The result of the previous

process will be the input of the last encryption. The output of AES-CMAC provides data integrity of the whole input message.

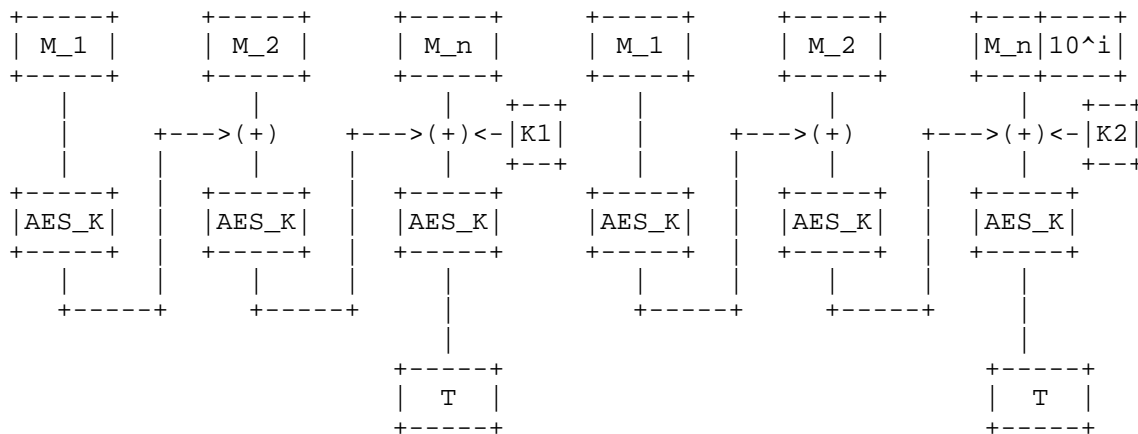

(a) positive multiple block length (b) otherwise

Figure 2.1. Illustration of the two cases of AES-CMAC

AES_K is AES-128 with key K.
 The message M is divided into blocks M_1, \dots, M_n , where M_i is the i-th message block.
 The length of M_i is 128 bits for $i = 1, \dots, n-1$, and the length of the last block, M_n , is less than or equal to 128 bits.
 K1 is the subkey for the case (a), and K2 is the subkey for the case (b).
 K1 and K2 are generated by the subkey generation algorithm described in section 2.3.

2.3. Subkey Generation Algorithm

The subkey generation algorithm, `Generate_Subkey()`, takes a secret key, K, which is just the key for AES-128.

The outputs of the subkey generation algorithm are two subkeys, K1 and K2. We write $(K1, K2) := \text{Generate_Subkey}(K)$.

Subkeys K1 and K2 are used in both MAC generation and MAC verification algorithms. K1 is used for the case where the length of the last block is equal to the block length. K2 is used for the case where the length of the last block is less than the block length.

Figure 2.2 specifies the subkey generation algorithm.

```

+-----+
+           Algorithm Generate_Subkey           +
+-----+
+
+   Input      : K (128-bit key)                +
+   Output     : K1 (128-bit first subkey)      +
+               K2 (128-bit second subkey)      +
+-----+
+
+   Constants: const_Zero is 0x00000000000000000000000000000000 +
+               const_Rb   is 0x00000000000000000000000000000087 +
+   Variables: L           for output of AES-128 applied to 0^128 +
+
+   Step 1.  L := AES-128(K, const_Zero);      +
+   Step 2.  if MSB(L) is equal to 0          +
+             then K1 := L << 1;              +
+             else K1 := (L << 1) XOR const_Rb; +
+   Step 3.  if MSB(K1) is equal to 0        +
+             then K2 := K1 << 1;            +
+             else K2 := (K1 << 1) XOR const_Rb; +
+   Step 4.  return K1, K2;                  +
+-----+

```

Figure 2.2. Algorithm Generate_Subkey

In step 1, AES-128 with key K is applied to an all-zero input block.

In step 2, K1 is derived through the following operation:

If the most significant bit of L is equal to 0, K1 is the left-shift of L by 1 bit.

Otherwise, K1 is the exclusive-OR of const_Rb and the left-shift of L by 1 bit.

In step 3, K2 is derived through the following operation:

If the most significant bit of K1 is equal to 0, K2 is the left-shift of K1 by 1 bit.

Otherwise, K2 is the exclusive-OR of const_Rb and the left-shift of K1 by 1 bit.

In step 4, (K1,K2) := Generate_Subkey(K) is returned.

The mathematical meaning of the procedures in steps 2 and 3, including `const_Rb`, can be found in [OMAC1a].

2.4. MAC Generation Algorithm

The MAC generation algorithm, `AES-CMAC()`, takes three inputs, a secret key, a message, and the length of the message in octets. The secret key, denoted by `K`, is just the key for AES-128. The message and its length in octets are denoted by `M` and `len`, respectively. The message `M` is denoted by the sequence of `M_i`, where `M_i` is the i -th message block. That is, if `M` consists of n blocks, then `M` is written as

$$- \quad M = M_1 \parallel M_2 \parallel \dots \parallel M_{\{n-1\}} \parallel M_n$$

The length of `M_i` is 128 bits for $i = 1, \dots, n-1$, and the length of the last block `M_n` is less than or equal to 128 bits.

The output of the MAC generation algorithm is a 128-bit string, called a MAC, which is used to validate the input message. The MAC is denoted by `T`, and we write $T := \text{AES-CMAC}(K, M, \text{len})$. Validating the MAC provides assurance of the integrity and authenticity of the message from the source.

It is possible to truncate the MAC. According to [NIST-CMAC], at least a 64-bit MAC should be used as protection against guessing attacks. The result of truncation should be taken in most significant bits first order.

The block length of AES-128 is 128 bits (16 octets). There is a special treatment if the length of the message is not a positive multiple of the block length. The special treatment is to pad `M` with the bit-string 10^i to adjust the length of the last block up to the block length.

For an input string `x` of r -octets, where $0 \leq r < 16$, the padding function, `padding(x)`, is defined as follows:

$$- \quad \text{padding}(x) = x \parallel 10^i \quad \text{where } i \text{ is } 128 - 8 * r - 1$$

That is, `padding(x)` is the concatenation of `x` and a single '1', followed by the minimum number of '0's, so that the total length is equal to 128 bits.

Figure 2.3 describes the MAC generation algorithm.

```

+++++
+           Algorithm AES-CMAC           +
+++++
+
+   Input   : K   ( 128-bit key )       +
+           : M   ( message to be authenticated ) +
+           : len ( length of the message in octets ) +
+   Output  : T   ( message authentication code ) +
+
+++++
+   Constants: const_Zero is 0x00000000000000000000000000000000 +
+           const_Bsize is 16 +
+
+   Variables: K1, K2 for 128-bit subkeys +
+           M_i is the i-th block (i=1..ceil(len/const_Bsize)) +
+           M_last is the last block xor-ed with K1 or K2 +
+           n     for number of blocks to be processed +
+           r     for number of octets of last block +
+           flag  for denoting if last block is complete or not +
+
+   Step 1.  (K1,K2) := Generate_Subkey(K); +
+   Step 2.  n := ceil(len/const_Bsize); +
+   Step 3.  if n = 0 +
+           then +
+               n := 1; +
+               flag := false; +
+           else +
+               if len mod const_Bsize is 0 +
+               then flag := true; +
+               else flag := false; +
+
+   Step 4.  if flag is true +
+           then M_last := M_n XOR K1; +
+           else M_last := padding(M_n) XOR K2; +
+   Step 5.  X := const_Zero; +
+   Step 6.  for i := 1 to n-1 do +
+           begin +
+               Y := X XOR M_i; +
+               X := AES-128(K,Y); +
+           end +
+           Y := M_last XOR X; +
+           T := AES-128(K,Y); +
+   Step 7.  return T; +
+++++

```

Figure 2.3. Algorithm AES-CMAC

In step 1, subkeys K_1 and K_2 are derived from K through the subkey generation algorithm.

In step 2, the number of blocks, n , is calculated. The number of blocks is the smallest integer value greater than or equal to the quotient determined by dividing the length parameter by the block length, 16 octets.

In step 3, the length of the input message is checked. If the input length is 0 (null), the number of blocks to be processed shall be 1, and the flag shall be marked as not-complete-block (false). Otherwise, if the last block length is 128 bits, the flag is marked as complete-block (true); else mark the flag as not-complete-block (false).

In step 4, M_{last} is calculated by exclusive-OR'ing M_n and one of the previously calculated subkeys. If the last block is a complete block (true), then M_{last} is the exclusive-OR of M_n and K_1 . Otherwise, M_{last} is the exclusive-OR of padding(M_n) and K_2 .

In step 5, the variable X is initialized.

In step 6, the basic CBC-MAC is applied to $M_1, \dots, M_{\{n-1\}}, M_{\text{last}}$.

In step 7, the 128-bit MAC, $T := \text{AES-CMAC}(K, M, \text{len})$, is returned.

If necessary, the MAC is truncated before it is returned.

2.5. MAC Verification Algorithm

The verification of the MAC is simply done by a MAC recomputation. We use the MAC generation algorithm, which is described in section 2.4.

The MAC verification algorithm, `Verify_MAC()`, takes four inputs, a secret key, a message, the length of the message in octets, and the received MAC. These are denoted by K , M , len , and T' , respectively.

The output of the MAC verification algorithm is either `INVALID` or `VALID`.

Figure 2.4 describes the MAC verification algorithm.

```

+++++
+           Algorithm Verify_MAC           +
+++++
+
+   Input   : K    ( 128-bit Key )        +
+           : M    ( message to be verified ) +
+           : len  ( length of the message in octets ) +
+           : T'   ( the received MAC to be verified ) +
+   Output  : INVALID or VALID           +
+
+-----+
+
+   Step 1.  T* := AES-CMAC(K,M,len);      +
+   Step 2.  if T* is equal to T'         +
+           then                          +
+               return VALID;             +
+           else                          +
+               return INVALID;          +
+
+++++

```

Figure 2.4. Algorithm Verify_MAC

In step 1, T^* is derived from K , M , and len through the MAC generation algorithm.

In step 2, T^* and T' are compared. If T^* is equal to T' , then return VALID; otherwise return INVALID.

If the output is INVALID, then the message is definitely not authentic, i.e., it did not originate from a source that executed the generation process on the message to produce the purported MAC.

If the output is VALID, then the design of the AES-CMAC provides assurance that the message is authentic and, hence, was not corrupted in transit; however, this assurance, as for any MAC algorithm, is not absolute.

3. Security Considerations

The security provided by AES-CMAC is built on the strong cryptographic algorithm AES. However, as is true with any cryptographic algorithm, part of its strength lies in the secret key, K , and the correctness of the implementation in all of the participating systems. If the secret key is compromised or inappropriately shared, it guarantees neither authentication nor integrity of message at all. The secret key shall be generated in a way that meets the pseudo randomness requirement of RFC 4086 [RFC4086] and should be kept safe. If and only if AES-CMAC is used

properly it provides the authentication and integrity that meet the best current practice of message authentication.

4. Test Vectors

The following test vectors are the same as those of [NIST-CMAC]. The following vectors are also the output of the test program in Appendix A.

Subkey Generation

K	2b7e1516	28aed2a6	abf71588	09cf4f3c
AES-128(key,0)	7df76b0c	1ab899b3	3e42f047	b91b546f
K1	fbeed618	35713366	7c85e08f	7236a8de
K2	f7ddac30	6ae266cc	f90bc11e	e46d513b

Example 1: len = 0

M	<empty string>			
AES-CMAC	bb1d6929	e9593728	7fa37d12	9b756746

Example 2: len = 16

M	6bc1bee2	2e409f96	e93d7e11	7393172a
AES-CMAC	070a16b4	6b4d4144	f79bdd9d	d04a287c

Example 3: len = 40

M	6bc1bee2	2e409f96	e93d7e11	7393172a
	ae2d8a57	1e03ac9c	9eb76fac	45af8e51
	30c81c46	a35ce411		
AES-CMAC	dfa66747	de9ae630	30ca3261	1497c827

Example 4: len = 64

M	6bc1bee2	2e409f96	e93d7e11	7393172a
	ae2d8a57	1e03ac9c	9eb76fac	45af8e51
	30c81c46	a35ce411	e5fbc119	1a0a52ef
	f69f2445	df4f9b17	ad2b417b	e66c3710
AES-CMAC	51f0bebf	7e3b9d92	fc497417	79363cfe

5. Acknowledgement

Portions of the text herein are borrowed from [NIST-CMAC]. We appreciate the OMAC1 authors, the SP 800-38B author, and Russ Housley for his useful comments and guidance, which have been incorporated herein. We also thank Alfred Hoenes for many useful comments. This memo was prepared while Tetsu Iwata was at Ibaraki University, Japan.

We acknowledge the support from the following grants: Collaborative Technology Alliance (CTA) from US Army Research Laboratory, DAAD19-01-2-0011; Presidential Award from Army Research Office, W911NF-05-1-0491; NSF CAREER ANI-0093187. Results do not reflect any position of the funding agencies.

6. References

6.1. Normative References

- [NIST-CMAC] NIST, Special Publication 800-38B, "Recommendation for Block Cipher Modes of Operation: The CMAC Mode for Authentication", May 2005.
- [NIST-AES] NIST, FIPS 197, "Advanced Encryption Standard (AES)", November 2001.
<http://csrc.nist.gov/publications/fips/fips197/fips-197.pdf>
- [RFC4086] Eastlake, D., 3rd, Schiller, J., and S. Crocker, "Randomness Requirements for Security", BCP 106, RFC 4086, June 2005.

6.2. Informative References

- [RFC-HMAC] Krawczyk, H., Bellare, M., and R. Canetti, "HMAC: Keyed-Hashing for Message Authentication", RFC 2104, February 1997.
- [OMAC1a] Tetsu Iwata and Kaoru Kurosawa, "OMAC: One-Key CBC MAC", Fast Software Encryption, FSE 2003, LNCS 2887, pp. 129-153, Springer-Verlag, 2003.
- [OMAC1b] Tetsu Iwata and Kaoru Kurosawa, "OMAC: One-Key CBC MAC", Submission to NIST, December 2002. Available from the NIST modes of operation web site at <http://csrc.nist.gov/CryptoToolkit/modes/proposedmodes/omac/omac-spec.pdf>

- [XCBCa] John Black and Phillip Rogaway, "A Suggestion for Handling Arbitrary-Length Messages with the CBC MAC", NIST Second Modes of Operation Workshop, August 2001. Available from the NIST modes of operation web site at <http://csrc.nist.gov/CryptoToolkit/modes/proposedmodes/xcbc-mac/xcbc-mac-spec.pdf>
- [XCBCb] John Black and Phillip Rogaway, "CBC MACs for Arbitrary-Length Messages: The Three-Key Constructions", *Journal of Cryptology*, Vol. 18, No. 2, pp. 111-132, Springer-Verlag, Spring 2005.

Appendix A. Test Code

This C source is designed to generate the test vectors that appear in this memo to verify correctness of the algorithm. The source code is not intended for use in commercial products.

```
/*
*****
/* AES-CMAC with AES-128 bit
/* CMAC Algorithm described in SP800-38B
/* Author: Junhyuk Song (junhyuk.song@samsung.com)
/* Jicheol Lee (jicheol.lee@samsung.com)
*****

#include <stdio.h>

/* For CMAC Calculation */
unsigned char const_Rb[16] = {
    0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
    0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x87
};
unsigned char const_Zero[16] = {
    0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
    0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00
};

/* Basic Functions */

void xor_128(unsigned char *a, unsigned char *b, unsigned char *out)
{
    int i;
    for (i=0; i<16; i++)
    {
        out[i] = a[i] ^ b[i];
    }
}

void print_hex(char *str, unsigned char *buf, int len)
{
    int i;

    for ( i=0; i<len; i++ ) {
        if ( (i % 16) == 0 && i != 0 ) printf(str);
        printf("%02x", buf[i]);
        if ( (i % 4) == 3 ) printf(" ");
        if ( (i % 16) == 15 ) printf("\n");
    }
    if ( (i % 16) != 0 ) printf("\n");
}
```

```
void print128(unsigned char *bytes)
{
    int    j;
    for (j=0; j<16;j++) {
        printf("%02x",bytes[j]);
        if ( (j%4) == 3 ) printf(" ");
    }
}

void print96(unsigned char *bytes)
{
    int    j;
    for (j=0; j<12;j++) {
        printf("%02x",bytes[j]);
        if ( (j%4) == 3 ) printf(" ");
    }
}

/* AES-CMAC Generation Function */

void leftshift_onebit(unsigned char *input,unsigned char *output)
{
    int    i;
    unsigned char overflow = 0;

    for ( i=15; i>=0; i-- ) {
        output[i] = input[i] << 1;
        output[i] |= overflow;
        overflow = (input[i] & 0x80)?1:0;
    }
    return;
}

void generate_subkey(unsigned char *key, unsigned char *K1, unsigned
                    char *K2)
{
    unsigned char L[16];
    unsigned char Z[16];
    unsigned char tmp[16];
    int i;

    for ( i=0; i<16; i++ ) Z[i] = 0;

    AES_128(key,Z,L);

    if ( (L[0] & 0x80) == 0 ) { /* If MSB(L) = 0, then K1 = L << 1 */
        leftshift_onebit(L,K1);
    } else { /* Else K1 = ( L << 1 ) (+) Rb */
```

```

        leftshift_onebit(L,tmp);
        xor_128(tmp,const_Rb,K1);
    }

    if ( (K1[0] & 0x80) == 0 ) {
        leftshift_onebit(K1,K2);
    } else {
        leftshift_onebit(K1,tmp);
        xor_128(tmp,const_Rb,K2);
    }
    return;
}

void padding ( unsigned char *lastb, unsigned char *pad, int length )
{
    int          j;

    /* original last block */
    for ( j=0; j<16; j++ ) {
        if ( j < length ) {
            pad[j] = lastb[j];
        } else if ( j == length ) {
            pad[j] = 0x80;
        } else {
            pad[j] = 0x00;
        }
    }
}

void AES_CMAC ( unsigned char *key, unsigned char *input, int length,
                unsigned char *mac )
{
    unsigned char      X[16],Y[16], M_last[16], padded[16];
    unsigned char      K1[16], K2[16];
    int                n, i, flag;
    generate_subkey(key,K1,K2);

    n = (length+15) / 16;          /* n is number of rounds */

    if ( n == 0 ) {
        n = 1;
        flag = 0;
    } else {
        if ( (length%16) == 0 ) { /* last block is a complete block */
            flag = 1;
        } else { /* last block is not complete block */
            flag = 0;
        }
    }
}

```



```

    }

    if ( flag ) { /* last block is complete block */
        xor_128(&input[16*(n-1)],K1,M_last);
    } else {
        padding(&input[16*(n-1)],padded,length%16);
        xor_128(padded,K2,M_last);
    }

    for ( i=0; i<16; i++ ) X[i] = 0;
    for ( i=0; i<n-1; i++ ) {
        xor_128(X,&input[16*i],Y); /* Y := Mi (+) X */
        AES_128(key,Y,X); /* X := AES-128(KEY, Y); */
    }

    xor_128(X,M_last,Y);
    AES_128(key,Y,X);

    for ( i=0; i<16; i++ ) {
        mac[i] = X[i];
    }
}

int main()
{
    unsigned char L[16], K1[16], K2[16], T[16], TT[12];
    unsigned char M[64] = {
        0x6b, 0xc1, 0xbe, 0xe2, 0x2e, 0x40, 0x9f, 0x96,
        0xe9, 0x3d, 0x7e, 0x11, 0x73, 0x93, 0x17, 0x2a,
        0xae, 0x2d, 0x8a, 0x57, 0x1e, 0x03, 0xac, 0x9c,
        0x9e, 0xb7, 0x6f, 0xac, 0x45, 0xaf, 0x8e, 0x51,
        0x30, 0xc8, 0x1c, 0x46, 0xa3, 0x5c, 0xe4, 0x11,
        0xe5, 0xfb, 0xc1, 0x19, 0x1a, 0x0a, 0x52, 0xef,
        0xf6, 0x9f, 0x24, 0x45, 0xdf, 0x4f, 0x9b, 0x17,
        0xad, 0x2b, 0x41, 0x7b, 0xe6, 0x6c, 0x37, 0x10
    };
    unsigned char key[16] = {
        0x2b, 0x7e, 0x15, 0x16, 0x28, 0xae, 0xd2, 0xa6,
        0xab, 0xf7, 0x15, 0x88, 0x09, 0xcf, 0x4f, 0x3c
    };

    printf("-----\n");
    printf("K "); print128(key); printf("\n");

    printf("\nSubkey Generation\n");
    AES_128(key,const_Zero,L);
    printf("AES_128(key,0) "); print128(L); printf("\n");
    generate_subkey(key,K1,K2);
}

```

```
printf("K1          "); print128(K1); printf("\n");
printf("K2          "); print128(K2); printf("\n");

printf("\nExample 1: len = 0\n");
printf("M          "); printf("<empty string>\n");

AES_CMAC(key,M,0,T);
printf("AES_CMAC      "); print128(T); printf("\n");

printf("\nExample 2: len = 16\n");
printf("M          "); print_hex("          ",M,16);
AES_CMAC(key,M,16,T);
printf("AES_CMAC      "); print128(T); printf("\n");
printf("\nExample 3: len = 40\n");
printf("M          "); print_hex("          ",M,40);
AES_CMAC(key,M,40,T);
printf("AES_CMAC      "); print128(T); printf("\n");

printf("\nExample 4: len = 64\n");
printf("M          "); print_hex("          ",M,64);
AES_CMAC(key,M,64,T);
printf("AES_CMAC      "); print128(T); printf("\n");

printf("-----\n");

return 0;
}
```

Authors' Addresses

Junhyuk Song
University of Washington
Samsung Electronics

Phone: (206) 853-5843
EMail: songlee@ee.washington.edu, junhyuk.song@samsung.com

Jicheol Lee
Samsung Electronics

Phone: +82-31-279-3605
EMail: jicheol.lee@samsung.com

Radha Poovendran
Network Security Lab
University of Washington

Phone: (206) 221-6512
EMail: radha@ee.washington.edu

Tetsu Iwata
Nagoya University

EMail: iwata@cse.nagoya-u.ac.jp

Full Copyright Statement

Copyright (C) The Internet Society (2006).

This document is subject to the rights, licenses and restrictions contained in BCP 78, and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in BCP 78 and BCP 79.

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgement

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).